

## LOCTITE® 3629C

July 2024

### PRODUCT DESCRIPTION

LOCTITE® 3629C provides the following product characteristics:

<b>Technology</b>	Epoxy
<b>Appearance</b>	Red
<b>Product benefits</b>	<ul style="list-style-type: none"> <li>• Halogen free</li> <li>• One component</li> <li>• Fast cure</li> <li>• High thermal mechanical strength</li> </ul>
<b>Cure</b>	Heat cure
<b>Application</b>	Surface mount adhesive

LOCTITE® 3629C epoxy is formulated for bonding surface mounted devices to printed circuit boards prior to wave soldering. It is designed provide controlled dot size and shape, making it particularly suitable for high speed dispensing.

### TYPICAL PROPERTIES OF UNCURED MATERIAL


Yield point, @ 25°C, Pa-s	
Haake PK 100, M10/PK1 2° Cone Casson model over 0.4-30 s <sup>-1</sup>	165
Specific gravity	1.38
Flash point - see SDS	
Pot life @ 25°C, days	7

### TYPICAL CURING PERFORMANCE

Recommended curing condition is exposure to heat above 100°C, (minimum 150 seconds @ 120°C or 90 seconds @ 150°C at the bondline). Rate of cure and final strength will depend on PCB type and population, ramp up temperature, stability of the component temperature and residence time at temperature.

#### Cure speed vs. temperature

The following graph shows the conversion rate with time and temperature.

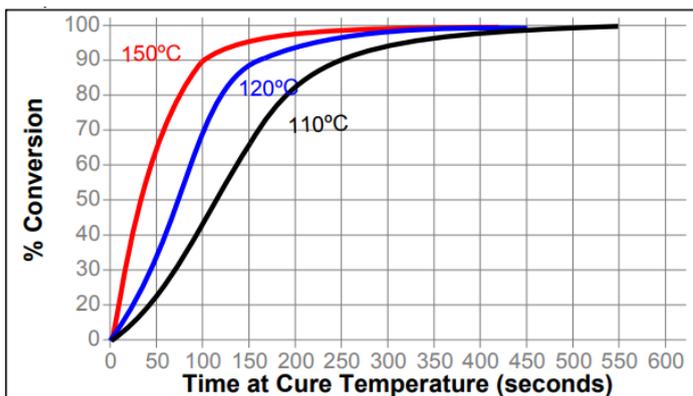

### TYPICAL PROPERTIES OF CURED MATERIAL

#### Physical properties

Coefficient of thermal expansion, ISO 11359-1, ppm/°C	
Below Tg	45
Above Tg	144
Glass transition temperature, (Tg) by TMA, °C:	
Sample cured 30 min @ 150°C	≥118
Density @ 25°C, g/cm <sup>3</sup>	1.4
DSC, °C	
Onset	82
Peak	120

#### General information

For safe handling information on this product, consult the Safety Data Sheet (SDS).

#### Thawing

1. Allow container to reach room temperature before use, normally 2 to 4 hours.

#### Directions for use

1. Avoid cross-contamination with other adhesive residues by ensuring dispense nozzles, adaptors, etc. are thoroughly cleaned.
2. Do not leave dirty nozzles on dispensing equipment while not in use or soaking in solvents for long periods of time.
3. The quantity of adhesive dispensed will depend on the dispense pressure, time, nozzle size and temperature.
4. These parameters will vary depending on the type of dispensing system used and should be optimised accordingly. The following are the recommended parameters for your reference:

Dispense machine	Panasonic HDF
Nozzle size, mm	0.33
Nozzle temp, °C	35
Nozzle stroke, mm	13.5
Air pressure, MPa	0.06

5. Dispensing temperature should ideally be controlled at a value between 30 to 35°C for optimum results, however higher dispense temperatures are possible.
6. Under normal work environment of 25°C and 55% RH, the product will remain dispensable for a maximum of 2 days of continuous operation. Higher temperatures or humidities will reduce the product's "on machine" life.
7. Uncured adhesive can be cleaned from the board with Isopropanol, MEK or ester blends such as LOCTITE® 7360.

## Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

**Optimal storage: 2 to 8°C. Storage below 2°C or above 8°C can adversely affect product properties.**

Material removed from the package may be contaminated during use. Do not return product to the original package. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

## Not for product specifications

The technical data contained herein are intended as reference only. Please contact your local quality department for assistance and recommendations on the specifications of this product.

## Conversions

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$   
 $\text{kV/mm} \times 25.4 = \text{V/mil}$   
 $\text{mm} / 25.4 = \text{inches}$   
 $\mu\text{m} / 25.4 = \text{mil}$   
 $\text{N} \times 0.225 = \text{lb}$   
 $\text{N/mm} \times 5.71 = \text{lb/in}$   
 $\text{N/mm}^2 \times 145 = \text{psi}$   
 $\text{MPa} \times 145 = \text{psi}$   
 $\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$   
 $\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$   
 $\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$   
 $\text{mPa}\cdot\text{s} = \text{cP}$

## Disclaimer

The information provided in this Technical data sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical data sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:**

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

**In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Corporation, or Henkel Canada Corporation, the following disclaimer is applicable:**

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

## Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 2